

PANEL-MOUNTED SOCKET OUTLETS ANGLED

according to IEC 60309, EN 60309, VDE 0623

plug2power




PANEL-MOUNTED SOCKET OUTLET ANGLED 20°

splash-proof IP54

*splash-proof IP44

- screwless terminals (plug2power)
- nickel-plated contacts

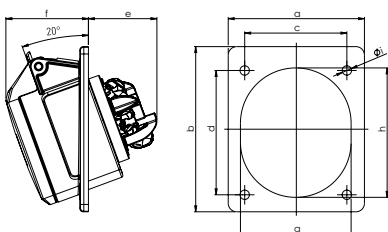

POLES	3	4	5	3	4	5
AMPERE	16			32		

Flange a	80	80	80	80	80	80
Flange b	97	97	97	97	97	97
Hole spacing c	60	60	60	60	60	60
Hole spacing d	73	73	73	73	73	73
e	41	41	41	48	48	48
f	47	47	49	54	54	55
g	51	56	65	65	65	70
h	61	67	76	75	75	80
i	5,5	5,5	5,5	5,5	5,5	5,5
Weight [g/each]	119	133	158	165	182	215

VOLTAGE	110 V~	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h


AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	F31SL1C	F31SL2C		10
16*	4	F41SL1C	F41SL2C	F41SL3C	10
16	5		F51SL2C	F51SL3C	10
32*	3	F32SL1C	F32SL2C		10
32*	4	F42SL1C	F42SL2C	F42SL3C	10
32	5 ^b		F52SL2C	F52SL3C	10



PANEL-MOUNTED SOCKET OUTLET ANGLED 20°

splash-proof IP54

- screw terminals
- brass contacts

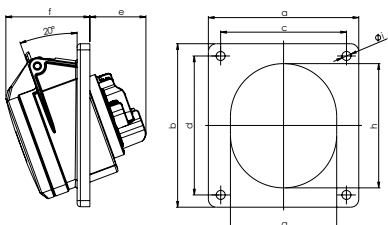

POLES	5	5
AMPERE	16	32

Flange a	92	92
Flange b	100	100
Hole spacing c	77	77
Hole spacing d	85	85
e	38	48
f	52	55
g	65	70
h	76	80
i	5,5	5,5
Weight [g/each]	175	246

VOLTAGE	400 V~
FREQUENCY	50/60 Hz
DESIGNATION	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	PACKING UNIT
16	5	F51S333	10
32	5	F52S333	10